


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 29 TOWNSHIP 15 RANGE 5  
DATE: -8-26-2000 7-1-05  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 6-24-93  
EDM

IN. S.P.C. E ZONE, NAD 83  
NAME: 15052904  
N: 496288.8420(m)  
E: 70701.2690(m)

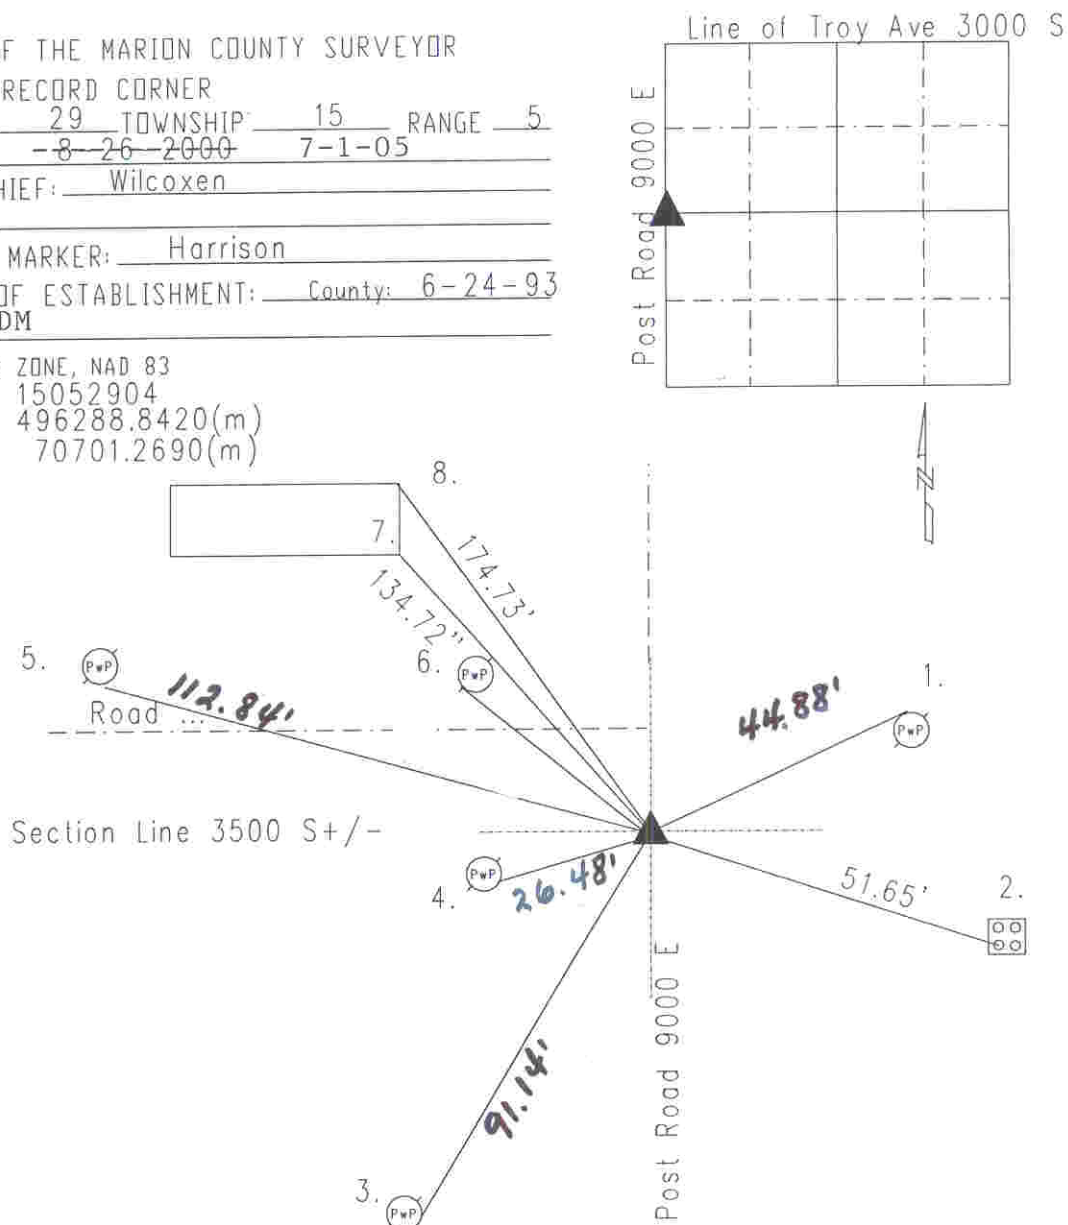

Original post set 1820 by Hendricks with witnesses: 30" beech N 17 W 21 links, 18" dogwood S 14 E 17 links per Marion County Atlas pg. 14. Hosbrook 4-23 & 24-1855 called rock; witnesses 12" beech S 42 1/2 W 38 links, 16" beech N 50 W 44 links per Franklin Township Legal Survey Book pg. 7. Monroe 11-3-51 called stone 2" down. Baden 8-8-75 called a PK nail over steel pin over stone. Wilcoxon 12-8-75 called a PK nail. Wilcoxon 1-28-93 called a PK nail. Wilcoxon excavated 6-24-93 and road nail found at surface. Harrison. set. Re-tied 8-26-2000 by Wilcoxon.

HC552904

REF.	DISTANCE	DESCRIPTION
1.	44.88'	Mag nail w/MCSO brass washer N PwP#134-651AB 12"up
2.	51.65'	SW bolt of concrete base
3.	91.14'	Mag nail w/MCSO brass washer E PwP# 194-681 A 10"up
4.	26.48'	Mag nail w/MCSO brass washer S PwP#33-681A 10"up
5.	112.84'	Mag nail w/MCSO brass washer S PwP#21-651 B 20"up
6.	31.80'	Mag nail w/MCSO brass washer
7.	134.72'	SE corner of brick ADDRESS 3404
8.	174.73'	NE corner of brick ADDRESS 3404